




ELO Hydraulic Valve Components Co., ...

150 mm x 225 mm x 35 mm NSK NU1030
JAPAN Bearing 800*1060*115

Bearing No. NU1030

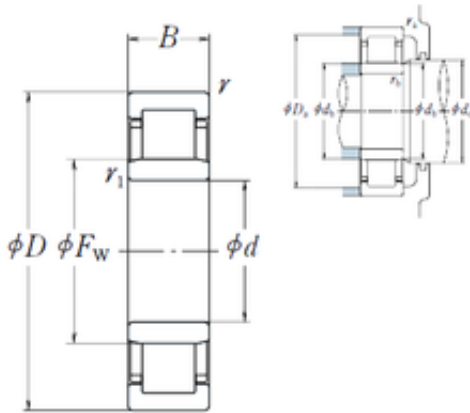

NU1030 Bearing 2D drawings and 3D CAD models

Bore Diameter	150 mm
Outer Diameter	205,5 mm
d	150 mm
Fw	169,5 mm
D	225 mm
Ew	205,5 mm
B	35 mm
C	35 mm
r min.	2,1 mm
r1 min.	1,5 mm
da min.	161 mm
ra max.	2 mm
rb max.	1,5 mm
Weight	4,77 Kg
Basic dynamic load rating (C)	202 kN
Basic static load rating (C0)	294 kN
(Grease) Lubrication Speed	2 800 r/min
hidYobi	NU1030
LangID	1
D_	225
B_	35
hidTable	ecat_NSCLDR
Oil rpm	3400
rb	1
mass	4.77



ELO Hydraulic Valve Components Co., ...

GRS rpm	2800
ra	2
db max	167
TSR rpm	3600
C0	294
DE_	205.5
Prod_Type3	CRB_SR_NU
da	161
DA_	18
Z_	25
D_a max	214
yobi	NU1030
C_conv	202000
ALPHA_	0
SDM_	187.5
r	2.1
db min	158
dc min	173
KBRG	4144
SBRG	10
r1	1.5
DI_	169.5