




ELO Hydraulic Valve Components Co., ...

160 mm x 290 mm x 80 mm NSK NU2232EM
JAPAN Bearing 130 × 230 × 40

Bearing No. NU2232EM

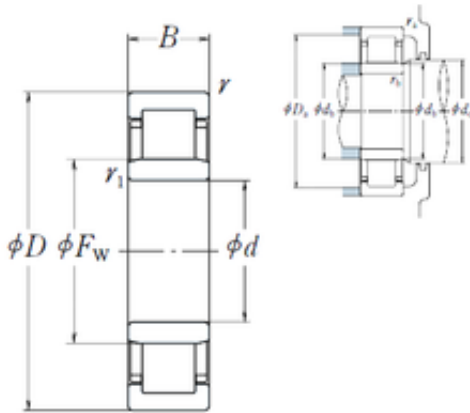

NU2232EM Bearing 2D drawings and 3D CAD models

Size	160x290x80 mm
Bore Diameter	160 mm
Outer Diameter	290 mm
Width	80 mm
d	160 mm
Fw	193 mm
D	290 mm
B	80 mm
C	80 mm
r min.	3 mm
r1 min.	3 mm
da min.	173 mm
Da max.	277 mm
db max.	188 mm
db min	173 mm
ra max.	2,5 mm
rb max.	2,5 mm
S	3,3 mm
Weight	24,5 Kg
Basic dynamic load rating (C)	810 kN
Basic static load rating (C0)	1190 kN
(Grease) Lubrication Speed	1 900 r/min
Category	Bearings
Inventory	0.0
Manufacturer Name	NSK



ELO Hydraulic Valve Components Co., ...

Minimum Buy Quantity	N/A
Weight / Kilogram	23.5
Product Group	B04144
hidYobi	NU2232EM
LangID	1
D_	290
Macha rpm	3600
B_	80
hidTable	ecat_NSCLDR
Oil rpm	2400
rb	2.5
mass	24.3
GRS rpm	1900
ra	2.5
db max	188
TSR rpm	2400
C0	1190
DE_	261
Prod_Type3	CRB_SR_NU
da	173
DA_	34
Z_	18
D_a max	277
yobi	NU2232EM
dd min	210
C_conv	810000
ALPHA_	0
SDM_	227
r	3
dc min	197
KBRG	4145
SBRG	22



ELO Hydraulic Valve Components Co., ...

r1	3
DI_	193